




T800 FULLY RUGGED TABLET

- Écran LumiBond® 2.0 HD de 8,1" pour une meilleure qualité d'affichage
- Module d'extension SnapBack exclusif avec combo lecteur de cartes à puce + UHF / HF RFID sans contact ou batterie étendue secondaire
- Lecteur de code-barres 1D/2D, port série, port Ethernet (en option)
- Certification MIL-STD-810H et IP65
- Sécurité d'entreprise améliorée avec le standard TPM 2.0 et le chiffrement de disque Windows



T800 3D demo

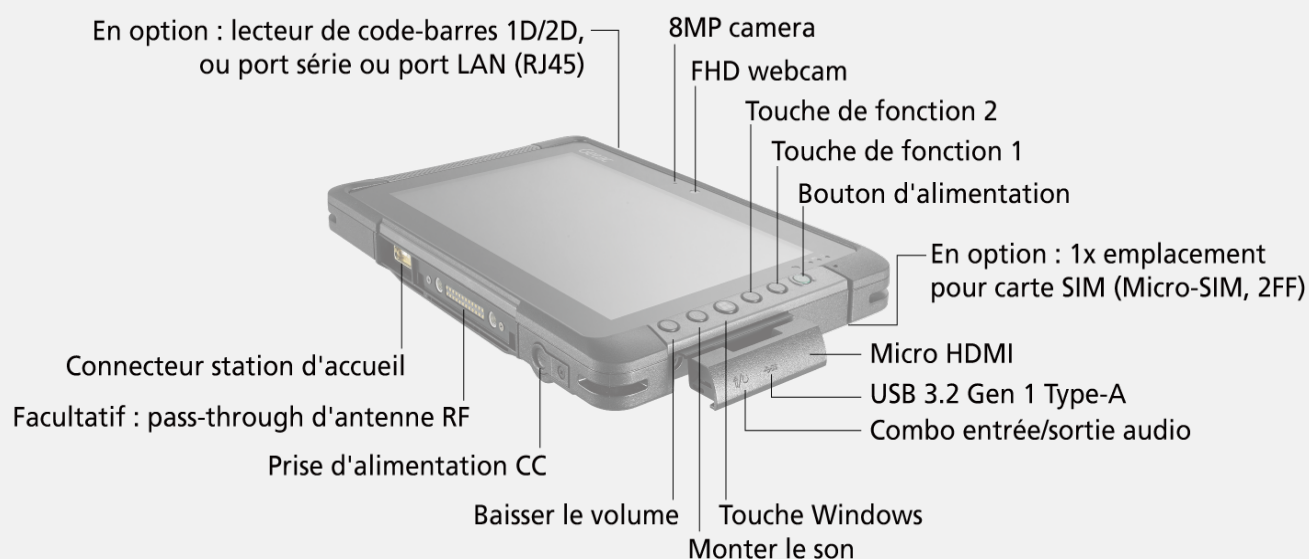

SPÉCIFICATIONS

Generation
G2

Système d'exploitation
Windows 10 IoT Enterprise

Plateforme informatique mobile
Intel® Atom Processor x7-Z8750 1.6GHz
Max. 2.56GHz
- 2MB Cache

Contrôleur Graphique
Intel® HD Graphics

Écran
8.1" Wide Viewing Angle TFT LCD WXGA (1280 x 800)
Protection film
600 nits LumiBond® display with Getac sunlight readable technology

Stockage et mémoire
4GB LPDDR3
Optional: 8GB LPDDR3
128GB eMMC
Optional: 256GB eMMC

Clavier
Power button
5 tablet programmable buttons

Périphérique de pointage
Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen (multi-touch and digitizer)

Logement d'extension
Optional: 1D/2D imager barcode reader, Serial port, Ethernet i
Optional: SnapBack add-on: Smart card and HF RFID/NFC reader combo ii
Optional: SnapBack add-on: 2nd expanded battery ii
Optional: SnapBack add-on: Smart card and magnetic stripe reader ii

Interface d'E/S
FHD webcam x 1
8M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 1 Type-A x 1
Micro HDMI 1.4 x 1
Docking connector x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF) iii
Optional: RF antenna pass-through for GPS, WWAN and WLAN

Interface de communication
Intel® Wi-Fi 6 AX200, 802.11ax
Bluetooth (v5.2) iv
Optional: Dedicated GPS
Optional: 4G LTE mobile broadband iii
Optional: 10/100/1000 base-T Ethernet (Occupies expansion slot)

Fonctionnalités de sécurité
TPM 2.0
Optional: SnapBack add-on: Smart card and HF RFID/NFC combo reader ii, v
Optional: SnapBack add-on: Smart card and magnetic stripe reader ii

Alimentation
AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery (7.4V, typical 4200mAh; min. 4080mAh)
LifeSupport™ battery swappable technology (only with SnapBack 2nd expanded battery)

Dimensions (l x P x H) et poids
227 x 151 x 24mm (8.93" x 5.94" x 0.94") vi
0.88kg (1.94lbs) vii

Caractéristiques de conception renforcée
MIL-STD-810H certified
IP65 certified
MIL-STD-461G certified
Vibration & 6ft (1.8m) drop resistant vii
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) viii

Spécifications environnementales
Temperature ix:
- Operating: -21°C to 50°C / -6°F to 122°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Logiciels préinstallés
Getac Utility
Getac Camera
Getac Barcode Manager x
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Persistence®

Logiciels en option
Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility xi

Accessoires
Battery (7.4V, typical 4200mAh; min. 4080mAh)
AC adapter (65W, 100-240VAC)
Capacitive stylus with tether
Optional:
Carry bag
Battery (7.4V, typical 4200mAh; min. 4080mAh)
2nd expanded battery (14.4V, 2100mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay expanded battery dock with adapter (Six-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
Office dock AC adapter (90W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen
Capacitive stylus with tether
Protection film
Hand strap
Shoulder strap (2-point)
Wrist strap
Vehicle cradle xii
Vehicle dock xii
Office dock

T800 FULLY RUGGED TABLET

Garantie Bumper-to-Bumper
Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard
Garantie Bumper-to-Bumper de 3 ans

i. 1D/2D imager barcode reader, Serial port, and Ethernet, are mutually exclusive options. ii. All SnapBack add-ons are mutually exclusive options. iii. Units with 4G LTE option comes with an embedded SIM card slot. iv. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. v. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant). vi. Weight and dimensions vary from configurations and optional accessories. vii. Drop test results vary from configurations and optional accessories. viii. Available with limited configurations and environment conditions. ix. Tested by an independent third-party test lab following MIL-STD-810H. x. Available when barcode reader option is selected. xi. Models require either embedded or standalone GPS module. xii. Havis vehicle dock is e-mark certified.

	Station d'accueil pour véhicule	Station d'accueil pour bureau
Port série	1	-
Port VGA externe	-	1
Micro	1	1
Sortie audio	1	1
Prise d'alimentation CC	1	1
Port USB	2	4
Port LAN	1	1
Port HDMI	-	1
Connecteur d'antenne RF	3 (WWAN, WLAN et GPS)	-

Getac



GETAC TECHNOLOGY CORPORATION
12, avenue du Québec Bâtiment Goyave
91140 Villebon sur Yvette Tel: +33 160 12
80 60 Sales-Getac-France@getac.com I
www.getac.com/fr/ Copyright © 2023 Getac
Technology Corporation and/or any of its affiliates.
All Rights Reserved. Les informations sont fournies
ici pour référence seulement, les spécifications
disponibles doivent faire l'objet d'un devis sur
demande.